Team Control Number
00000
Problem Chosen
B
2023 HiMCM
Summary Sheet

Electrifying a Metro Bus Fleet Without Reducing Service

Question and baseline. We study conversion of TransLink's fixed-route bus service to fully electric operation by 2033 while preserving every 2023 departure and capacity level. Existing trolleybuses count as electric; ordinary renewal is the comparator.

Model. We link fleet purchases to actual trips, source blocks, capacity, winter state of charge, chargers, spares and garage limits. Gross discounted cost is separated from payments after 0%, 25% or 50% grants; emissions use matched boundaries; only feasible plans enter the Pareto frontier.

Observed result. The recovered fall-2023 GTFS contains 54,497 trips in 25 service patterns. The representative weekday has 1,752 source-declared blocks and 1,087 simultaneous trips; annual fixed-route service is 5.58 million hours and 106.87 million km. Vehicle identity, age, depot and site power remain unresolved.[2, 13]

Solved planning result. At a 300-km overnight-charge sensitivity, 1,741 sequential duty requests scale to 1,612 net new batteries after 18 existing BEBs, with 57 double-deck blocks still requiring in-route charging. The conditional ten-year gross value is CAD 4.58 billion versus CAD 2.33 billion for steady-state renewal (economic score −96.4%); a 50% grant changes the agency score to −16.4%. The named production, operation and maintenance boundary yields 29.2–82.4% emissions reduction; the low end assumes renewable diesel/RNG. London's 17-year renewal peak is 776 vehicles per year.[9, 17, 13]

Recommendation. Start depot power and grid upgrades in 2024, preserve the recovered service patterns, and procure proven 40-/60-ft blocks first. Gate double-deck and shuttle conversion on in-route charging, all-electric winter tests and verified site capacity.

Keywords: electric bus; fleet replacement; service preservation; charging; life-cycle cost.

Contents

1 Problem definition and study boundary **3**

2 Evidence and baseline audit **3**

3 Fleet and service model **8**

3.1 Decision variables and normal-renewal baseline 8

3.2 Hard service and technical constraints 8

3.3 Optimization and executed decomposition 10

4 Costs, funding and environmental accounting **10**

5 Observed and conditional results **11**

5.1 Fall 2023 block and range screen 11

5.2 Conditional ten-year cost and emissions 13

5.3 Charging tariffs and the value of firm power 17

6 Ten-year roadmaps for three metropolitan areas **19**

6.1 A solved age-cohort planning benchmark 20

7 Sensitivity, limitations and decision boundary **22**

References **22**

Letter to a Metro Vancouver decision-maker **25**

1 Problem definition and study boundary

The competition asks for environmental and financial consequences, a ten-year transition in three metropolitan areas, and a decision-maker letter.[1] We take 31 December 2023 as Vancouver's decision baseline and plan purchases and construction in 2024–2033. Documents published in 2024–2026 inform later sensitivity checks, but their realized purchases are not backdated into 2023 decisions. Metro Vancouver is the primary case; its census metropolitan area had 2,642,825 residents in 2021, exceeding the problem's 500,000-person threshold.[5] Chicago and London test transferability using their separately dated 2023 fleet snapshots; London's March audit is not treated as December stock.

Prior fleet models optimize electric vehicle count and mix jointly with charging and scheduling,[30] use a multi-period purchase, salvage and demand-charge formulation,[31] or solve multi-depot time-window and recharge constraints.[32] This study connects those ideas to a recovered public timetable, a capacity proxy where the vehicle roster is absent, a normal-renewal comparator, and a separately stated emissions boundary. The result is also a data-validity test: a missing garage or winter record changes the status to `UNVERIFIED` rather than becoming a zero-cost assumption.

The problem's definition requires propulsion *and accessories* to use a zero-emission electric source. Thus a battery bus with a diesel auxiliary heater is not fully electric in this study. TransLink's historical depot-BEB cost table assumes precisely such a heater at 0.02 L/km; its 1.4 kWh/km electricity figure cannot be carried over unaltered to an all-electric winter bus. Renewable diesel, renewable natural gas and hybrids do not satisfy the endpoint. Hydrogen fuel cells are treated as a separate zero-tailpipe option because eligibility would require a certified zero-emission hydrogen supply. Already electric trolleybuses satisfy the endpoint, provided their wired operation remains feasible. TransLink has a 2040 zero-emission target, making 2033 an accelerated counterfactual.[9, 17]

The decision unit is year y, bus class k, depot d, trip i, vehicle v and charger interval t. Classes include standard, articulated, highway coach, double-deck, community shuttle and trolley vehicles. We preserve 2023 fixed-route coverage and do not offset electrification cost by reducing service.

2 Evidence and baseline audit

The 2025 budget's 2023 actual service table includes SeaBus in its published transit subtotal. We subtract 13,713 SeaBus hours, 185,370 km and 71,367,323 capacity km to obtain the fixed-route bus values in Table 1; the source's five operating-group rows reconcile exactly in the accompanying audit. The implied service-km-weighted average capacity is $5{,}715{,}791{,}401/106{,}868{,}324 = 53.48$ passenger spaces per bus-km, an aggregate calibration target rather than a standard-bus specification. The earlier statutory report rounds bus hours to 5,577,000, yielding a slightly different 98.013% route coverage check.[13, 25]

The fall GTFS is preserved at commit `eb584b1` of an independent public mirror, and every local source file matches its immutable Git blob. Its first-stop distance field is absent for every trip, so exact trip length is unknown; a monotonic shape-distance envelope gives a median interval width of 0.432 km, about 4.3%, and a maximum 26.309 km. We use the upper bound only for conservative energy screening and never fill the exact field. The annual CSV has 191 route identifiers while the feed has 232 route short names with trips because the annual table groups some branches and

omits discontinued service. Both are retained with that version difference. The GTFS does not supply vehicle ids, ages, depot links, battery state or an as-operated record. Route and arrival data are used by permission of TransLink, which assumes no responsibility for their accuracy or currency.[2]

The 2018 official service guidelines define peak load factor as average peak passengers divided by practical vehicle capacity. Their reference capacities are 24 (mini-bus), 47 (standard trolley), 50 (standard bus or coach), 70 (articulated trolley), and 75 (articulated bus). Dividing each positive 2023 time-bin load by its load factor reproduces one of these values in 8,705 of 9,371 cells; a further 344 cells give exactly 85, consistent with TransLink's separately described 80–86-seat double-deck vehicles. Thus 9,049 cells (96.56%) match six capacity clusters, and 322 do not. Across 180 routes with positive cells, 34 show more than one cluster or an unmatched cell. This is a useful *aggregate vehicle-class diagnostic*, not a trip-level vehicle assignment: capacities are historical averages, the 85-person class is inferred, and mixed or differently averaged cells cannot establish an individual bus's capacity. The reproducible cell-level calculation and every unmatched value are retained in the data supplement.[20, 21, 27]

Capacity must also be checked on the replacement vehicle. Current TransLink operating limits are 20 passengers for community shuttles, 77 for 40-ft buses and 120 for articulated buses; the 2018 planning values are lower and distinguish seating from practical capacity.[22, 20] Manufacturer examples span 68 passengers for a Nova LFSe+, 88 for a current 40-ft Xcelsior CHARGE NG, 118 for the 2023 XE60 specification and 123 for the current XE60. A smaller electric bus therefore requires another departure vehicle or a different model when the baseline departure has 77 or 120 spaces.[23, 24]

The 2023 accountability report also records 112,591 tonnes CO_2e of *revenue-fleet operating* emissions, comprising 110,402 Scope-1 and 2,189 Scope-2 tonnes; it separately reports 33,718 tonnes of biogenic CO_2 from renewable fuels. The revenue-fleet number covers bus and non-bus modes, excludes vehicle and station manufacture, and reflects that year's renewable-fuel mix (96% of purchased bus natural gas was renewable). It is therefore an independent accounting check and an upper bound on the included bus operating inventory, not a substitute for the 2024–2033 same-service, life-cycle normal-renewal baseline.[28]

A later 18 November 2025 CMBC allocation table provides a retrospective fleet-profile check: 1,733 active buses at seven sites, including 261 trolleys, 22 battery buses, 535 hybrids, 365 CNG, 379 diesels and 171 gasoline shuttles; 63 more are in storage. Its manufacture-year counts reconcile to 1,733 and imply 392 buses aged 0–4 years, 543 aged 5–9, 91 aged 10–14, 705 aged 15–19 and two older than 20. It is not substituted for the 2023 register. Combined with the observed 2023 trolley and zero-emission counts, we use a derived 2023 total of 1,725 with an interval 1,711–1,733 and label it an estimate. About 285 vehicles were built in 2023–2025; a strict 2033 endpoint would retire many of them at age 8–10, so the cost model must include early replacement.[29, 7]

The 2020 TransLink fleet transition plan records 1,672 CMBC vehicles, including 188 standard and 74 articulated trolleybuses.[9] These are historical values, not a verified 2023 fleet register. The February 2023 notice gives 262 trolleys, while a December official article says approximately 275 trolleys and five BEBs. A same-day release gives only their combined count, 280. Subtracting February's 262 from December's 280 would imply 18 BEBs, but this crosses reporting dates and conflicts with the explicit December article. We therefore use no exact December BEB stock count.[6, 7, 8] A June 2023 Board report lists 2023–24 procurement projects for 46 articulated hybrids, 15 standard BEBs, 50 CNG buses, 168 community shuttles and 25 double-deck buses; it

records the 25 double-deck buses as accepted on a Q2 2023 timeline, while the other group totals were mostly outstanding. These are procurement states, not a year-end fleet roster.[11] A valid 2033 purchasing table still requires an age, class and depot register.

A separate June 2023 TransLink presentation places four BEBs and 262 trolleys in service *at that date*. It gives screening prices of approximately CAD 1.2 million per BEB and CAD 0.46–0.61 million per on-route charger. Its then-current capital concepts put Hamilton Route 100 charging at CAD 2.3 million, Port Coquitlam plus ten on-route chargers at CAD 46 million, and a Marpole depot sized for 340 BEBs at CAD 500 million. A newly built 500–600-bus-equivalent depot was screened at CAD 1.2–1.8 billion including land and development. These are 2023 planning envelopes with different scopes, *not* delivered item prices or additive line items; their commissioning dates changed in later plans. They supply bounded infrastructure cases while site-specific electrical capacity and construction cash flow remain missing.[12, 17]

A 2025 capital-program audit narrows the age uncertainty: 188 standard trolleys entered service in 2006–07 and 73 articulated trolleys were expected to retire in 2028–29. It identifies projects tied to 57 diesel-hybrids and 50 CNG buses reaching end of life in 2023, 126 diesel-hybrids in 2024, 36 diesel-hybrids and nine highway coaches in 2025, and 39 articulated diesels in 2026. The plan specifies 57 BEBs for 57 retiring hybrids, seven BEBs for six retiring hybrids, and 45 articulated BEBs for 39 retiring diesels in three separate programs. These are retrospective planned cohorts, not confirmed 2023 stock, deliveries, or a route-feasible 2033 solution. The 57-BEB project's CAD 106.846 million gross capital budget includes CAD 102.498 million of reported external funding; divided by 57, its *gross project budget* is CAD 1.874 million per planned bus. The other identified BEB projects yield CAD 1.867 million per planned standard bus and CAD 3.037 million per planned articulated bus on the same budget/count arithmetic. These are project envelopes, not delivered bus-only unit quotes. The accompanying cohort audit reproduces the ratios and divisions from the published table.[13]

As a bounded funding illustration using only the 57-BEB project's gross budget, assuming *all* CAD 106.846 million is grant-eligible, 0%, 25% and 50% hypothetical grants leave agency payments of CAD 106.846, 80.135 and 53.423 million, respectively. The gross project budget remains CAD 106.846 million in each case. These are undiscounted funding splits of one later-reported program, not incremental economic scores: eligibility, spending dates, and the same-service conventional renewal budget are unresolved. The actual CAD 102.498 million external-funding entry is a distinct retrospective budget fact and does not override the problem's 50% scenario limit.[13]

A subsequent 2026 plan changes the retrospective picture further. A named project now proposes 39 60-foot diesel buses, 64 in-route-charged 40-foot BEBs and 153 depot-charged 40-foot BEBs for 236 retiring diesels: 256 planned replacement vehicles, or 1.085 per retirement. Another cohort proposes 31 BEBs for 27 retiring hybrids, a 1.148 ratio. The 2025 plan's 45 articulated BEBs for 39 retiring diesels is an earlier description with possible cohort overlap; its count is *not* added to the later project. The 2025 plan separately names 50+84+30=164 CNG replacements for 2023–2025 retirement cohorts. Thus these distinct named programs plan $164 + 39 = 203$ non-electric replacement vehicles associated with 2023–2026 retirement cohorts. If procured and still operating, all 203 would need accelerated removal to achieve the strict 2033 endpoint. This is a planning-exposure count, not a verified delivery count or a complete 2033 fleet requirement.[13, 15]

To show the size of the early-retirement term without inventing a 2026 bid, suppose only the 39 planned 60-foot diesels entered service at the start of 2026 and were withdrawn at the start of 2033. The historical TransLink assumptions are a 17-year life and an approximately CAD

1.0-million 60-foot diesel price in 2019 currency. A straight-line unused-capital proxy would be $39(1.0)(10/17) = 22.94$ million in *2019 CAD before resale*. This is not an observed loss or an incremental project cost: resale/redeployment, actual purchase prices and the choice to avoid these purchases in a 2023 decision change the economic comparison. It shows why premature retirement cannot simply be omitted.[9, 15]

2023 observation	Value	Source/status
Published route identifiers	191	official CSV[19]
Fall GTFS bus trips; service patterns	54,497; 25	`23SEP_20231020`[2]
Maximum service day trips; source blocks	22,492; 1,756	8 September 2023[2]
Representative weekday blocks; simultaneous trips	1,752; 1,087	14 November 2023[2]
Route service hours	5,466,190.5	official CSV[19]
Actual fixed-route bus hours, excluding SeaBus	5,575,772	2023 actual[13]
Actual fixed-route bus service km	106,868,324	same source[13]
Actual fixed-route bus capacity km	5,715,791,401	same source[13]
Route-file share of exact bus hours	98.035%	calculated
Route/time-bin frequency rows; nonmissing	6,261; 6,041	official CSV[26]
Route/direction/time-bin load rows; nonmissing	11,659; 9,371	official CSV[27]
Revenue-fleet operating GHG, all modes	112,591 t CO_2e	2023 report[28]
CNG fleet count	299	2023 report[28]
Trolley plus battery-electric buses	280	Dec 2023 notice[7]
Battery-electric buses	about 5	Dec 2023[8]
Trolley buses	262	Feb 2023 notice[6]
2022 detailed CMBC fleet snapshot	1,711	historical anchor[29]
Derived 2023 fleet total	1,725 (1,711–1,733)	bridge estimate[29]
2025 active CMBC fleet	1,733; 22 battery, 261 trolley, 1,450 other	18 Nov 2025[29]

Table 1: The recovered fall timetable supplies source-declared trips and blocks. The annual route table and fall feed use different version and aggregation scopes.

3 Fleet and service model

3.1 Decision variables and normal-renewal baseline

Let x_{ykda} be buses purchased into class k, depot d and age cohort a; r_{ykda} old vehicles retired from that cohort; h_{ydq} charger positions of power type q; and z_{iv} equal one when vehicle v performs scheduled trip i. Let c_{vt} denote charge energy and e_{vt} battery energy. For ordinary renewal, age-expired conventional buses are replaced with conventional equivalents while the *same calendar service pattern and passenger-capacity demand* is served. Electric candidates are compared with that feasible renewal path. Historical purchase expenditure is sunk; early retirement enters through foregone residual or sale value.

For each class and depot, stock obeys

$$N^p_{y,k,d,a} = N^p_{y-1,k,d,a-1} + x^p_{y,k,d,a} - r^p_{y,k,d,a}, \quad p \in \{\text{electric}, \text{conventional}, \text{trolley}\}. \tag{1}$$

No diesel, hybrid, CNG or hydrogen propulsion or non-electric accessory may operate on any fixed-route trip in 2033. Retirement and purchase are not constrained one-for-one: needed vehicle counts emerge from schedules and spare ratios. A short-range vehicle may force additional buses, chargers or drivers.

3.2 Hard service and technical constraints

For every calendar service pattern p, every scheduled trip $i \in I_p$ is retained at its route, direction and departure time. Multiple smaller buses may serve one departure when necessary, and each assigned class must be compatible:

$$\sum_{v \in V_i} z_{iv} \geq 1 \qquad (i \in I), \tag{2}$$

$$\sum_{v \in V_i} Q_v z_{iv} \geq Q^0_i \qquad (i \in I), \tag{3}$$

$$\sum_{i \in I_{r,s,t}} \sum_{v \in V_i} Q_v z_{iv} \geq Q^0_{r,s,t}. \tag{4}$$

The final expression denotes capacity available at the original route–direction peak; the trip-level inequality protects each departure. A smaller bus can replace a larger one only if an additional vehicle on that departure restores the capacity and both vehicles pass scheduling, energy and site checks. Accessible trips require accessible vehicles; depot/class spare stocks are protected. If demand growth is modeled, it is applied equally to baseline and electric cases.

The source-declared block is the second hard unit. For consecutive trips $i \prec j$ in block b, retained on one vehicle, $s_j - e_i \geq \tau^{road}_{ij} + t^{turn}_{ij}$. If splitting is necessary, both vehicles must be able to reach a documented exchange or charging site without moving a departure. In the fall feed, 879 of 1,752 weekday blocks interline more than one route; 0 of 4,850 sequential transfers has zero gap across more than 0.5 km, supporting GTFS blocks as duty hypotheses. Only 3 transfers provide a gap of at least 60 minutes. Most long blocks therefore cannot recharge midday without replacement or terminal charging; distance divided by range is only a screen, not a vehicle count.

As a separate *calibration check*, the schedule covers 22,492 bus trips on the maximum service day, while the annual output should reproduce 5,575,772 fixed-route bus service hours, 106,868,324

service km and 5,715,791,401 capacity km within documented measurement differences. The capacity-km subtotal detects systematic undersupply, but cannot substitute for departure, block and site constraints.[2, 13]

The executed range screen uses

$$d_b^U = \sum_{i \in b} \ell_i^U, \qquad n_{bk}^{(j)} = \left\lceil \frac{d_b^U}{R_k^{(j)}} \right\rceil, \tag{5}$$

where $R_k^{(j)}$ is an assumed reliable range and $n_{bk}^{(j)}$ is the number of sequential duty requests. This is a necessary screening bound. A route exchange, depot return or charger restriction can only increase the physical requirement, while sharing split duties between blocks may reduce it; the result is therefore not a purchase count.

Each vehicle's assigned trips and charging intervals cannot overlap. Location-to-location deadhead times must fit between events, including departure from and return to its depot. Driving to or from service also removes a vehicle from the available depot spare count. For battery vehicles, energy follows

$$e_{v,t+1} = e_{vt} + \eta_q c_{vt} - \epsilon_{vk}^{\text{traction,winter}} (\ell_{it} + \ell_{vt}^{\text{deadhead}}) - E_{vt}^{\text{accessories}}, \tag{6}$$

$$\underline{s}_v B_v \le e_{vt} \le \bar{s}_v B_v. \tag{7}$$

Here $E_{vt}^{\text{accessories}}$ includes all-electric cabin heating and other onboard equipment during trips, deadhead, charging and active layovers; the traction coefficient excludes that energy to prevent double counting. An unmeasured winter accessory load makes an electric schedule `UNVERIFIED`, not zero-energy. Battery capacity and passenger capacity are linked when battery weight reduces available seats or payload. Charger occupancy, power and opening year impose

$$\sum_v u_{vdt} \le H_{dt}, \quad \sum_v P_{vdt} \le P_{dt}^{\text{grid}}, \quad H_{dt} = 0 \text{ until commissioned.} \tag{8}$$

Conventional baseline vehicles instead require a fuel budget, with jointly calibrated distance and elapsed-duty rates a_v, b_v in a consistent fuel unit (L or kg):

$$F_{v,t+1} = F_{vt} - a_v \ell_{vt} - b_v \Delta t, \qquad F_v^{\text{reserve}} \le F_{vt} \le F_v^{\text{tank}}. \tag{9}$$

The implemented check assumes no refuelling within a duty; the time rate includes stationary consumption and must not duplicate the distance rate. Missing fuel data leave the normal-renewal comparator unverified. Such vehicles may serve intermediate years but cannot satisfy the strict 2033 endpoint.

Trolleybuses use a separate wired-network check. Each trip, deadhead and powered layover needs a certified connected path and an operating feeder. Concurrent demand must obey $\sum_{v \in V_{ft}} P_v \le P_f^{\text{firm}}$, where firm power is available after other loads and reserve. The code conservatively reserves each vehicle's measured all-in peak draw on every feeder traversed for the entire moving segment; stationary accessories use their separate demand. A failure of this sufficient power certificate calls for finer feeder timing before declaring physical infeasibility. Missing path or feeder records leave existing trolley operation unverified, without assigning these vehicles fictitious batteries or buying their capacity again.

Depot bus parking capacity, charger footprint, charging efficiency, construction lead time and route-specific winter testing must also pass. A charger site may be the home depot or a route terminal, provided the location and travel-time checks pass. The accompanying validator checks the supplied trip, energy and site records, returning `UNVERIFIED` for missing essential inputs; it cannot certify a city-wide solution from time-bin averages.

3.3 Optimization and executed decomposition

The full problem is

$$\min C^{\text{gross}} \quad \text{s.t.} \begin{array}{l} \text{service, block and capacity;} \\ \text{SOC, charger and feeder;} \\ \text{spare, inventory and endpoint.} \end{array} \tag{10}$$

followed by the ϵ-constraint family $\min C^{\text{gross}}$ subject to $G \le \epsilon$ for the Pareto frontier. The station and depot register is insufficient for that global integer program. We therefore execute a documented decomposition: (i) audit every calendar service pattern and block; (ii) screen alternate reliable ranges; (iii) price a fixed-service accelerated replacement scenario; and (iv) compute matched production, operation and maintenance emissions. The validator classifies absent inputs as `UNVERIFIED`. This separated approach follows the joint fleet/scheduling logic of Rogge et al., the multi-year transition logic of Pelletier et al., and the multi-depot timing logic of Gkiotsalitis et al.[30, 31, 32]

4 Costs, funding and environmental accounting

Let K_y include bus and battery procurement (initial battery included in a quoted vehicle price), chargers, depot civil work, grid connection and distribution upgrades, construction/design, training and any extra buses. Let O_y include electricity, fuel, maintenance, replacement batteries, drivers, demand charges and regular charging-site upkeep. Let S_y be realized salvage and R_{2033} the remaining value of vehicles and durable infrastructure at the horizon. With a stated real discount rate r and consistent price year,

$$C^{\text{gross}} = \sum_{y=2024}^{2033} \frac{K_y + O_y - S_y}{(1+r)^{y-2023}} - \frac{R_{2033}}{(1+r)^{10}}, \tag{11}$$

$$\Delta C = C^{\text{gross}}_{\text{electric}} - C^{\text{gross}}_{\text{renewal}}. \tag{12}$$

For grant rate $f \in \{0, 0.25, 0.50\}$ and eligible expenditures E_y, $C^{\text{agency}} = C^{\text{gross}} - \sum_y f E_y/(1+r)^{y-2023}$. A grant changes who pays, not gross buses, copper, electricity or labour. Local employment and procurement impacts require an additional regional economic model and are reported separately to avoid double counting.[33]

The regional layer records direct local procurement L_y, wages W_y and job-years J_y. Any induced value added uses a regional input–output multiplier m_y on labour and supplier value added, $V_y^{\text{local}} = m_y(L_y + W_y)$, not on the entire gross construction outlay. Feasible charging capacity, reliability and terminal asset value enter the fleet model through served trips, avoided extra vehicles, bill savings and residual value. Construction spending is not counted again as a benefit.

Define a life-cycle greenhouse-gas inventory over equal service:

$$G = G_{\text{vehicle+battery}} + G_{\text{infrastructure}} \tag{13}$$

$$+ \sum_y \left(G_{\text{fuel,y}} + G_{\text{electricity,y}} + G_{\text{maintenance,y}}\right) - G_{\text{end of life}}. \tag{14}$$

Electricity uses an explicitly selected grid-intensity scenario. British Columbia's 2023 integrated-grid factor is 0.0113 kg CO_2e/kWh; it is an annual average and should be varied against marginal-

generation possibilities.[34] On-route NO_x, particles, electricity use and battery-production impacts appear in separate columns rather than being concealed by a single carbon score. If compatible manufacturing/infrastructure factors are absent, the *life-cycle* score is unavailable even when operating emissions can be estimated.

The requested scores are

$$S_C = 100\frac{C_{\text{renewal}} - C_{\text{electric}}}{C_{\text{renewal}}}, \qquad S_G = 100\frac{G_{\text{renewal}} - G_{\text{electric}}}{G_{\text{renewal}}}. \tag{15}$$

Negative values remain negative. The economic score is based on *gross* cost, with subsidized agency cost shown beside it; otherwise the 50% grant would artificially change the societal merit ranking.

5 Observed and conditional results

5.1 Fall 2023 block and range screen

The recovered feed contains 54,497 bus trips, 25 calendar service patterns and 1,684,516 bus stop-time records after excluding rail, SeaBus and HandyDART. On 14 November 2023 it schedules 22,431 trips and 1,752 source-declared blocks. At the busiest instant, 1,087 trips are simultaneous. The largest service day, 8 September, has 22,492 trips in 1,756 blocks. These are planned duties, not an as-operated or vehicle registry.[2]

For energy screening, we classify blocks by the 2023 route–time capacity signature: 24, 47, 50, 70, 75 and 85 passenger-space proxies. The labels identify capacity only. Route blocks with 47/70 signatures are retained as a trolley-route proxy because the separate 2023 fleet count has 262 trolleys, but the GTFS contains no propulsion field. The 57 weekday 85-person double-deck blocks are excluded from the overnight-depot arithmetic. A 300-km scenario gives 1,741 sequential battery-block requests for 1,502 participating blocks, 239 extra requests (15.9%). At the 149/150-km electric-heat band, the corresponding requirement is 2,444 requests (62.7% more). Saturday and Sunday produce larger ratios because fewer blocks cover long weekend duties; the weekday total sets the selected fleet scale.

Proxy class	Baseline blocks	Additional sequential block requests by range 150	185	250	300	350 km
40-ft battery proxy	1244	788	577	333	202	96
60-ft battery proxy	258	154	119	66	37	25

Table 2: 2023-11-14 service with 1,752 published duty blocks and 1,087 simultaneous trips. Capacity signatures are route-level proxies, not observed bus assignments. The 40-ft battery proxy contains minimum/standard capacity classes and 216 unclassified blocks; 47/70-seat signature blocks are retained only as a trolley-route proxy, and 85-person double-deck blocks are unassessed. Counts are daily sequential block requests, not a garage fleet or one-for-one bus count.

Only 3 of 4,850 weekday block transitions provide at least 60 minutes of gap, and none provides 90 minutes. The blocks therefore mainly require overnight charging, terminal charging or a documented vehicle exchange. No zero-gap transition spans more than 0.5 km in a straight line. This

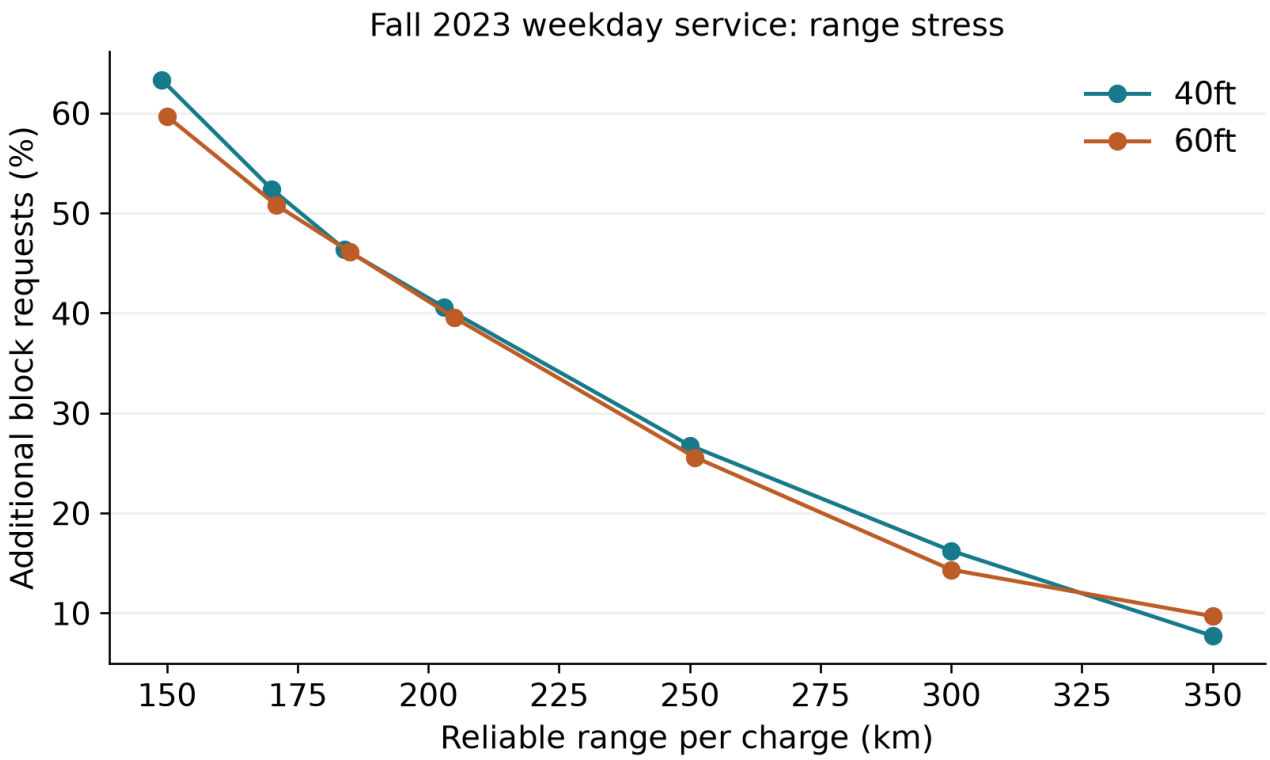


Figure 1: Distance divided by reliable range is a screening bound for extra sequential duty requests. It does not include route exchange time, garage return, charger occupancy or spare buses. Capacity signatures are not certified vehicle assignments.

supports retaining source blocks as duty hypotheses, while the missing garage and charger links prevent an operational pass.

5.2 Conditional ten-year cost and emissions

We evaluate an accelerated fixed-service policy case rather than relabel a full replacement as ordinary renewal. A uniform 17-year fleet renews 10/17 of its positions in a decade; the derived 1,388 non-deck fossil buses yield 816 baseline purchases. The 1,741 duty ratio scales to 1,630 battery positions on the derived 1,406-bus non-double-deck fleet. Retaining the 18 existing BEBs gives 1,612 net new batteries. Vehicle prices use the 2023 CAD 1.2-million hardware screen in the lower case and the weighted 2025 project envelopes of CAD 1.874 million for a standard and CAD 3.037 million for an articulated bus in the upper case. The baseline uses the published 50-CNG-bus project envelope, CAD 0.923 million per planned vehicle.[12, 13, 14]

Depot infrastructure is priced at the 2023 Marpole screening ratio of CAD 500 million per 340 BEBs in the base case. The high case uses the 2024 CAD 6.52-billion screening envelope, which includes service expansion and multiple sites and is therefore a resource-cost sensitivity.[12, 17] Vehicles and infrastructure are spread over the implementation years; vehicle residual value follows a 17-year straight-line life. O&M applies only to the fossil-service share and ramps toward the BEB rate. Driver hours, already-electric trolley renewal and the 57 double-deck vehicles are outside this scored sub-boundary.

The larger purchase count already charges much of the early-retirement burden: 1,612 new batteries enter a 1,406-bus non-deck fleet before 2033, while the steady-state renewal path buys 816. Salvage and redeployment value of displaced young buses are not credited, so the base result is conservative on that item. Conversely, the high infrastructure envelope includes expansion not required by fixed 2023 service, so it is an upper-side sensitivity.

Scenario	Gross PV (CAD bn)	Score (%)
Conventional renewal	2.329	0
Electric, base infrastructure	4.575	-96.4
Electric, screening high	8.646	-271.2
Agency PV and score, grants 0/25/50% (base plan)		
	4.575 / 3.643 / 2.710	-96.4 / -56.4 / -16.4

Table 3: Conditional 2024–2033 policy case. The 1,741 sequential duty requests are scaled to a derived 1,463-bus non-trolley fleet under a 300-km range, giving 1,630 battery positions and 1,612 net purchases after the 18 existing BEBs. The 57 double-deck blocks and 262 trolleys are outside this scored boundary. The baseline renews 10/17 of fossil positions; vehicle residual follows a 17-year life. The high infrastructure envelope includes expansion.

The base gross present value is CAD 4.58 billion against CAD 2.33 billion for steady-state renewal, giving an economic score of −96.4%. The high infrastructure and class-specific vehicle case reaches CAD 8.65 billion and −271.2%. A 50% external grant changes the base agency payment to CAD 2.71 billion and the score to −16.4%; it improves affordability without reducing the project's resource cost. These figures are not a certified city optimum: the winter range is a 2020 sensitivity, depot power is absent, and the 2023 age roster is unavailable.

Baseline operating mix	g CO_2e/km	Renewal (kt)	Electric (kt)	Score (%)
renewable fuel mix	302	376.2	266.4	29.2
rng heavy	960	960.4	266.4	72.3
weighted mix	1233	1202.8	266.4	77.8
fossil diesel	1580	1510.9	266.4	82.4

Table 4: Conditional ten-year emissions over the named boundary: vehicle and battery production, operating energy, and maintenance. Depot/charging construction and end-of-life credits are excluded. The renewable mix assumes 80% renewable-diesel reduction plus 96% RNG for CNG; RNG-heavy uses RNG but fossil diesel; weighted mix uses the 2020 propulsion mix.

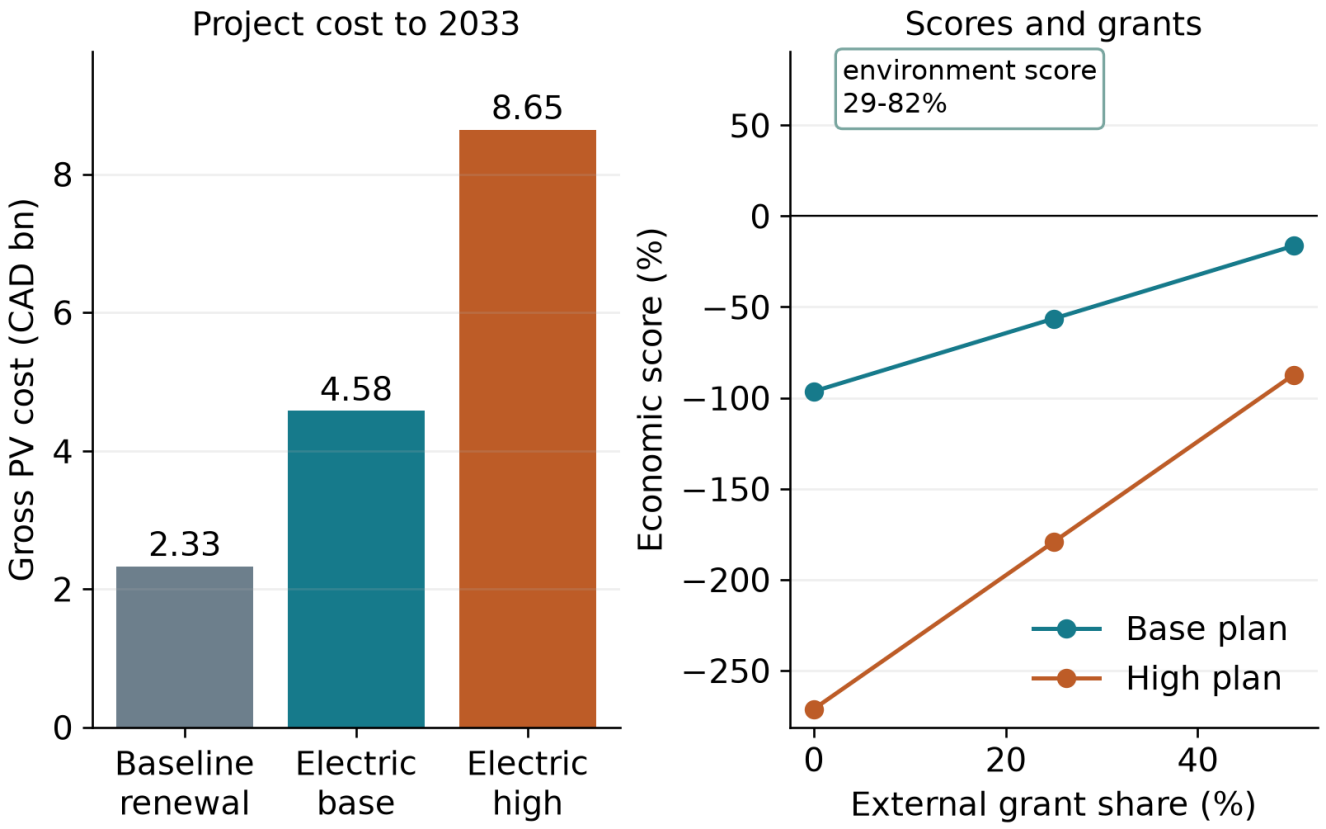


Figure 2: Conditional economics and funding. Gross cost remains negative-scored under grants; the resource cost does not disappear. The boxed range is the 29.2–82.4% environment score over a production, operation and maintenance boundary that excludes depot construction and end-of-life credits.

The named environmental boundary includes vehicle and LFP-battery production, operating energy and maintenance. Baseline operating intensity is 0.302–1.58 kg CO_2e/km; the electric case uses 19 g/km. Over ten years, the score is 29.2–82.4%, with 376–1511 kilotonnes in the baseline and 266 kilotonnes in the plan. Depot and charger construction and end-of-life credits are excluded, so this is not a complete life-cycle claim. Tailpipe NO_x and PM become zero for converted trips. The 2023 accountability report gives 346 tonnes of criteria air contaminants across the revenue fleet, but no bus-only allocation, so only the local elimination mechanism is quantified here; grid and battery effects are reported separately.[18, 17]

At 1.37–2.0 onboard kWh/km and 90% charging efficiency, converted non-deck service needs approximately 135–197 GWh/year from the grid; the 1.6 kWh/km central value gives 158 GWh/year. The 1,612 new 335-kWh batteries contain about 31.3 kilotonnes of modeled LFP-production CO_2e using the transferred factor. These are scale checks, not a site load profile or a Vancouver battery specification.

As a historical benchmark, the route table still covers 98.035% of independently reported actual bus hours. The 2019-CAD and 2024-O&M reference cases retain their original narrower boundaries. These checks and the fixed-service policy case support the fleet decision; only an operator trip, garage, charger and age register can certify every 2033 duty.

For a transparent *historical parameter demonstration*, the 2020 plan lists a 2019-CAD 40-foot diesel purchase of CAD 630,000, a depot BEB purchase of CAD 1,110,000, a 50-kW depot charger position of CAD 298,000, a 0.60 L/km diesel rate, a 1.4 kWh/km BEB electricity rate, 0.02 L/km of BEB heater fuel and 68,000 km per bus annually.[9] One-to-one vehicle purchase premium is CAD 480,000; 68,000 km implies 40,800 L for diesel, versus 95,200 kWh *plus 1,360 L heater fuel* for the historical BEB. At BC's 2023 *average* factor, its electricity alone corresponds to about 1.076 t CO_2e/year. The BEB's heater makes it ineligible for the 2033 endpoint, and replacing that heater with electric heat changes winter energy demand. The CAD 298,000 charger quotation already includes design, permitting, project management, financing and a construction contingency; those items must not be charged again. This is neither a 2023 bid nor a complete cost/emissions comparison. TransLink's historical planning replacement ratio of 1.15 for depot charging shows why one-to-one replacement is unsafe.[9]

For a separate *electric-only 40-foot reference case*, the same plan models in-route charging at CAD 4.86/km, versus CAD 4.62/km for diesel, 4.77/km for hybrid and 4.15/km for CNG, all in 2019-CAD lifetime cost. The three alternative economic scores are −5.19%, −1.89% and −17.11% respectively. The December 2020 update explicitly uses hybrid replacements as its conventional base case for retiring diesel/hybrid buses and CNG replacements for retiring CNG buses; the diesel comparison is a sensitivity reference. None is a fleet score: normal-renewal vehicle type, route assignment and replacement timing determine the actual denominator. Its in-route table specifies 1.6 kWh/km with no auxiliary fuel; using 0.60 L/km for diesel, the federal heavy-duty diesel combustion factor of 2.630 kg CO_2e/L and BC's 2023 average grid factor of 0.0113 kg CO_2e/kWh gives an *operational-only* diesel-to-BEB GHG score of 98.85% at identical distance. At 68,000 km/year, that is 106.07 t CO_2e/year of modeled operating savings per equivalent bus. Fall-2023 scheduled blocks are now recovered, but vehicle identities, as-operated execution and charging-site capacity remain unavailable; vehicle/battery/infrastructure manufacturing and fuel supply are excluded, so a complete life-cycle city-wide score remains unavailable.[9, 10, 35, 34]

The 2024 ZEFTP offers a separate retrospective check. Its operating-and-maintenance costs are 3.30, 1.97, 2.77 and 2.28 CAD/vehicle-km for diesel, hybrid, CNG and BEB, respectively. On

that *O&M-only* boundary, BEB scores are +30.91%, −15.74% and +17.69% against the three alternatives; vehicle, battery and charger capital are absent. Its electric-heater BEB is reported at 19 g CO_2e/km, versus 1580 for fossil diesel, 1420 for fossil hybrid, 1350 for fossil CNG and 250 for renewable CNG. Fuel mix therefore changes the operational environmental comparator. These 2024 values are neither 2023-known procurement inputs nor full life-cycle 2024–2033 totals; they cannot be added to the older 2019-CAD costs.[17]

An independent 2024 ICCT e-bus life-cycle method supplies transferable *sensitivity factors*: 6.6 kg CO_2e per kg of vehicle glider/powertrain, 58 kg CO_2e per kWh of LFP battery, and 52.4/67.5 g CO_2e/km for diesel/BEB maintenance. Its 12–15 m example uses a 335-kWh battery and glider masses from Latin American buses, so these are not observed TransLink specifications. Its own system boundary excludes charging infrastructure and bus recycling. We retain separate terms for these missing components and do not substitute this partial method for a completed Vancouver life-cycle inventory.[18]

Facility timing is also consequential. A December 2020 program listed 677 planned BEB purchases and CAD 246.4 million of depot/charging investments, but subsequent 2024 review targeted Port Coquitlam for over 100 BEBs in 2027 and Marpole for roughly 340 in 2028. It estimated six to eight years to deliver charging at existing transit centres and recommended commissioning six to twelve months before bus delivery. These are planning and later-review quantities, not 2023 installed charger counts. The 2024 screening capital envelope includes service expansion and has a stated −50% to +100% accuracy range, so assigning it wholesale to our fixed-2023-service scenario would misstate incremental cost.[10, 17]

The 2020 update provides a useful *published-program arithmetic check*. Its Table 1 awards 449 depot-charged standard, 136 in-route-charged standard and 92 depot-charged articulated BEBs during 2020–2029, totaling 677 *planned awards*, not deliveries. The reported incremental vehicle-purchase premium is CAD 236.9 million nominal; Table 3 adds CAD 246.4 million of depot/charging investment; and Table 5 projects CAD 96.3 million of cumulative operating savings through 2030 relative to its hybrid-renewal baseline. The resulting undiscounted component sum is CAD $236.9 + 246.4 - 96.3 = 387.0$ million. Annual operating cells rounded to CAD 0.1 million sum to CAD 96.1 million in savings, differing by CAD 0.2 million from the printed total; we use the printed total and retain the discrepancy in the audit. The 15 awards in 2020 were funded in an earlier program. The update anticipated electric purchases for retiring diesel/hybrid buses, yet the later 2025 plan lists 84 CNG buses for a 2024 hybrid retirement cohort; this is direct evidence that the older purchase pathway was revised. These source-period amounts cannot be rebased into 2024–2033 cost, grant or GHG scores: facility spending dates, later procurement revisions, 2023 fleet stock and all-electric winter duty feasibility are absent.[10, 13]

The historical depot analysis supplies a direct *winter feasibility stress test*. With 660-kWh articulated batteries and fuel heaters, it projected depot-dependent replacement ratios of 1.13–1.55 and warned that electric-only heat could require roughly 10% more buses. Applied mechanically to the later capital project's 39 retiring articulated diesels, $\lceil 39(1.10)r_d \rceil$ gives 49–67 BEBs across hypothetical depot allocations, compared with its 45 planned depot-charged BEBs. The 4–22 difference is a *historical-technology sensitivity*, not a measured shortage: the 39 actual depot assignments, 2026 energy specifications and block schedules are unknown. It identifies a concrete winter trial and procurement question before certifying the strict 2033 endpoint.[9, 13]

5.3 Charging tariffs and the value of firm power

The original 2023 budget assumes diesel at CAD 1.66/L; this is a planning price, not an actual invoice. Its 32.17-million-L operational volume includes a broader system boundary and is not treated as fixed-route bus consumption.[3] BC Hydro's April-2023 tariff supplies energy, monthly demand and daily basic charges. RS1640 bills peak demand only during 06:00–22:00; RS1650's zero demand fee ends in March 2026 under that historical schedule. We therefore distinguish billed peak from physical grid power and do not extrapolate the temporary concession through 2033.[4]

For daily grid energy E, available charging hours T, site limit P, and rate-specific billed hours T_j, solve

$$\min M_j : \quad \sum_{t \in T} p_t \Delta t = E, \quad 0 \le p_t \le P, \quad p_t \le M_j \ (t \in T_j). \tag{16}$$

Power is zero outside T. If h_0 available hours are outside the billing window and $h_1 > 0$ are inside, the sharp lower bound is $M_j \ge \max\{0, (E - h_0 P)/h_1\}$. Physical feasibility also requires $E \le (h_0 + h_1)P$; a wholly nonbilled feasible window gives $M_j = 0$. The executed CPU LP matches this independent bound in every feasible case. A second stage minimizes physical peak at the optimal billed peak. Monthly bills include energy, basic and demand charges, the prior-winter eleven-period minimum-bill floor, and the 1% rider refund; taxes and capital are excluded.

We normalize to 100 *distance-equivalent units*, each at the historical 68,000 km/year reference. These are not an observed fleet or a one-for-one replacement count. Historical onboard energy of 1.37–2.0 kWh/km, assumed charging efficiencies of 85/90/95%, three common return windows and 2.5/3.5/5-MW site limits give 243 scenarios. Annual energy is spread evenly across 365 days; this relaxation does not certify winter energy, battery capacity, charger-port occupancy or actual bus availability. A meter-measured intensity would not be divided by efficiency again.[9]

Rate	Physical MW	Billed MW	Annual CAD million
1600	4.140	4.140	1.350
1640	4.140	0.000	0.905
1650 (pre-Apr 2026)	4.140	4.140	1.113

Table 5: Conditional charging bounds for 100 distance-equivalent units, 68,000 km/year each, 1.6 battery-kWh/km, 90% charging efficiency, 22:00–06:00 availability and 5-MW site power. April-2023 prices are frozen for a 365-day comparison; bills include the 1% rider refund and exclude taxes and capital.

In the central case, an eight-hour window needs at least 4.140 MW, and RS1640 saves 32.96% of the RS1600 electricity bill. At 3.5 MW, eight-hour-only charging is impossible under the declared energy requirement. Extending availability to 20:00–06:00 restores aggregate feasibility, but RS1640 then costs CAD 1.285 million/year versus CAD 1.227 million under RS1600. The bills cross at 3.598 MW; two separate LP solutions confirm this threshold. Between 3.312 and 4.140 MW, each extra firm kW saves CAD 594/year under RS1640 in this fixed-price, fixed-window case, before paying for the upgrade. This quantifies an infrastructure contribution through feasible service and avoided bills, without crediting construction expenditure as a second benefit. Individual vehicle certification and dated future tariffs remain necessary before using these bounds in a purchasing decision.

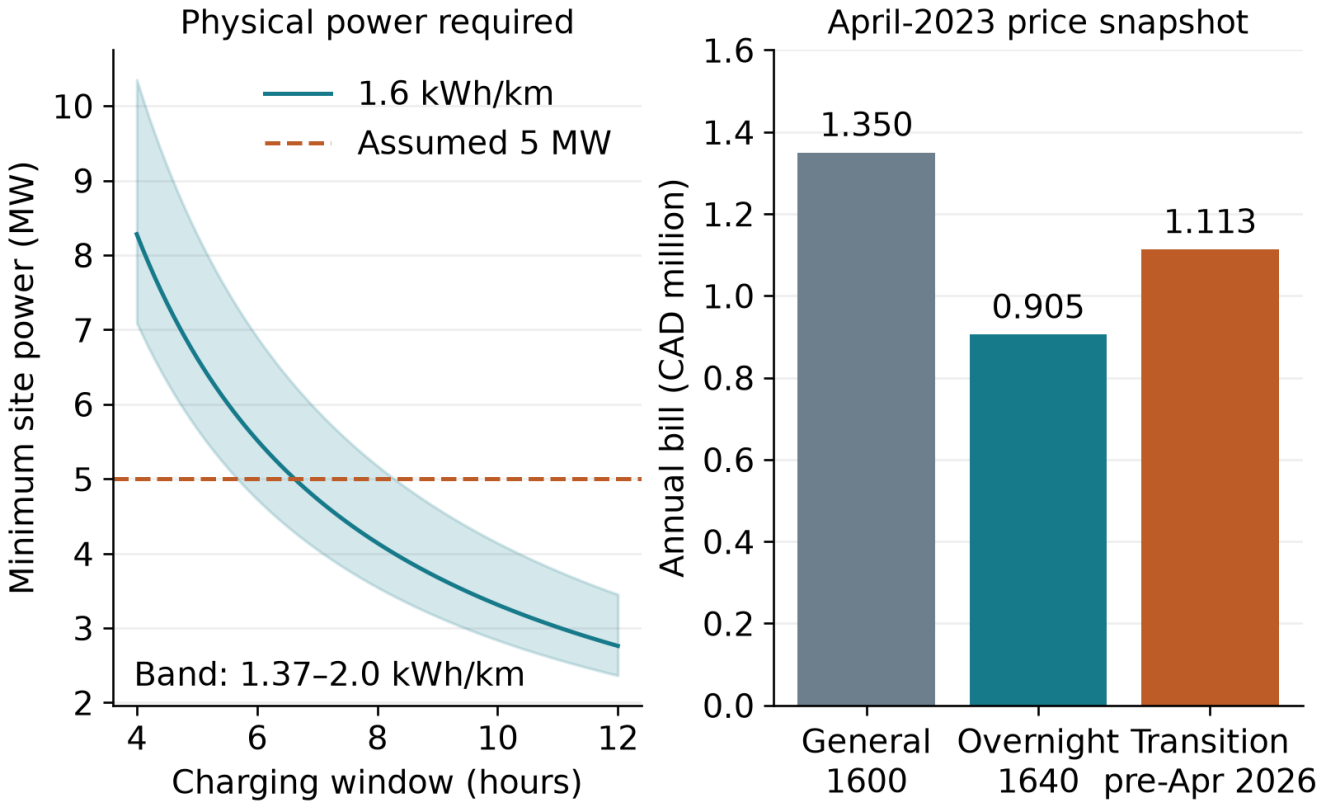


Figure 3: Physical charging-power bounds and conditional tariff bills. The left panel uses 90% charging efficiency; the right uses the central eight-hour case. A zero billed peak still requires 4.140 MW of physical power.

Depot	Active	Non-trolley	50-kW scale (MW)
VTC	430	169	8.45
HTC	289	289	14.45
BTCN	107	107	5.35
BTCS	161	161	8.05
STC	266	266	13.30
PTC	235	235	11.75
RTC	245	245	12.25
Total	1733	1472	73.60

Table 6: 2025-11-18 CMBC active-fleet scale by site. This is retrospective allocation, not 2023 stock; the power column is active non-trolleys times the historical 50-kW planning allowance, not available transformer capacity.

At the 2020 planning allowance of 50 kW per depot-charged bus, 1,612 net new batteries imply about 80.6 MW of aggregate connected capacity. TransLink's 2024 long-range estimate is 78 MW for full-fleet electrification by 2040. The 2023 accelerated plan therefore has roughly the same grid-scale challenge as the published 2040 path. This is a portfolio scale check, not a site transformer rating; only a feeder and interconnection study can determine 2033 feasibility.[9, 17]

6 Ten-year roadmaps for three metropolitan areas

Year	Vancouver EV	Renewal base	Chicago EV	London renewals
2024	162	82	185	775
2025	162	82	185	776
2026	161	82	185	776
2027	161	82	185	776
2028	161	82	185	776
2029	161	82	185	776
2030	161	81	185	776
2031	161	81	185	776
2032	161	81	185	776
2033	161	81	185	776
Total	1612	816	1850	7759

Table 7: Transferable ten-year purchase plans. Vancouver reports net new battery-bus planning positions after the 18 existing BEBs, derived from a 1,463-bus non-trolley fleet and the 300-km block-request ratio; 57 double-deck vehicles and 262 trolleys are separate. Chicago linearly replaces the non-electric year-end inventory; London renews registration chunks under a 17-year chassis-life scenario, including existing EVs. These are planning positions, not verified orders or route-feasible purchases.

The Vancouver column is an active-duty planning table, not a garage roster. After scaling the 1,741 sequential block requests to the derived 1,463-bus non-trolley fleet and retaining 18 existing BEBs, the 300-km case requires 1,612 net new batteries over 2024–2033, about 161 per year. The 57 double-deck block requests remain outside until in-route charging and payload are certified. The steady-state conventional comparator renews 816 fossil positions. Because the published facility delivery range is six to eight years, depot design, utility applications and permits must begin in 2024 even if bus deliveries are phased later. A funded annual order near the tabulated level and a physically commissioned site must precede each service conversion.[17]

Chicago's year-end inventory is 1,875 buses, of which 25 are inferred from the June 2023 base order plus two earlier plug-ins. Replacing the 1,850 non-electric buses linearly costs 185 electric positions per year. That schedule does not escape age risk: 1,056 buses are at least 13 years old and 539 at least 16. Under a 17-year chassis-life scenario, at least 539 positions are already near a 2024 renewal deadline; a 14-year scenario creates 1,056. Its matched fuel table yields annual diagnostics of 0.825 L diesel/km and 1.733 charging kWh/km, but covers only 85.55

London starts from 8,643 contracted positions, including 950 electric and 20 hydrogen. A 17-year cohort scenario renews 7,759 positions in total, with a peak of 776 per year; the 14- and

12-year scenarios require 977 and 2,568 in their busiest years. The 12-year case is a timely-renewal stress scenario. London has the strongest public age register of the three, but its audit does not supply route blocks, depot power, winter energy or local vehicle prices, so its roadmap remains availability-based.[40]

The later 2025 Investment Plan reports 4.424 million bus service hours in 2033, below the independently reported 2023 actual total. Because those accounting boundaries differ, we retain the 2023 service schedule as the hard floor rather than credit the transition with reduced operation; reconciling the later plan is a separate reporting task.[16, 13]

6.1 A solved age-cohort planning benchmark

For London, an original *fleet slot* denotes one available vehicle position of the same body type. Renewing a slot requires suitable electric capacity; the operational model may require additional vehicles. Let n_c be the observed size and b_c the registration year of cohort c, and choose a maximum chassis-life scenario L. These caps are assumptions for sensitivity, not asserted TfL rules. A non-electric cohort must renew by $d_c = \min(2033, \max(2024, b_c + L))$. An existing electric cohort enters the renewal model only when $b_c + L \leq 2033$; the 2013 Routemaster retains its chassis vintage despite its 2022 electric retrofit.[40]

Let integer a_{cy} allocate original slots to renewal years $2024 \leq y \leq d_c$. We first minimize the required peak annual renewal capacity M:

$$\min M : \qquad \sum_{y \leq d_c} a_{cy} = n_c, \quad \sum_c a_{cy} \leq M, \quad a_{cy} \in \mathbb{Z}_+. \tag{17}$$

With M fixed, a second solve minimizes $\sum_{c,y}(d_c - y)a_{cy}$, avoiding avoidable early renewal. Among ties, a third solve prioritizes earlier non-electric conversion without changing either optimum. This is an executed integer program using the public cohort counts, not an assumed uniform purchase schedule.

An independent certificate follows from $D_t = \sum_{c:d_c \leq t} n_c$:

$$M^\star = \max_{t=2024,\ldots,2033} \left\lceil \frac{D_t}{t - 2023} \right\rceil. \tag{18}$$

Necessity follows because all D_t slots must fit into $t - 2023$ annual capacities. Sufficiency follows by allocating the earliest-deadline cohorts first when every cohort may renew from 2024. Later technical release dates, class-specific production limits and charging construction can increase the requirement; the certificate concerns this cohort submodel.

Life cap	Peak slots/year	Existing EV renewals	Total slots
12	2,568	735	8,428
14	977	247	7,940
17	776	66	7,759

Table 8: Optimal London fixed-availability cohort benchmarks, 2024–2033. Life caps are scenarios. Counts are renewed original fleet slots; operational feasibility can require additional buses.

All three scenarios were solved on CPU using SciPy's HiGHS mixed-integer solver; every optimization phase reaches zero gap and the peak optima match the analytic bound. With a 17-year

cap, 7,693 non-electric slots convert and 66 existing electric slots renew, requiring peak capacity 776 per year. The 14-year scenario requires 977 in its busiest year and renews 247 existing electric slots. The 12-year cap creates a 2,568-slot catch-up obligation in 2024 because much of the observed fleet is already near or above that cap. It is a stress case, not a recommended lifetime.

The 17-year scenario advances 21,908 slot-years relative to the assumed chassis-life deadlines, compared with 334 under the 14-year scenario. These are remaining-service exposures, not monetary losses: resale and ordinary-renewal cash flows are needed to value them. The benchmark provides a numerical ten-year procurement-capacity test while retaining the operational feasibility gate.

Year	Converted slots	EV renewals	Non-electric slots left
2024	775	0	6,918
2025	776	0	6,142
2026	776	0	5,366
2027	776	0	4,590
2028	776	0	3,814
2029	776	0	3,038
2030	775	1	2,263
2031	770	6	1,493
2032	769	7	724
2033	724	52	0

Table 9: An optimal London 17-year-cap fleet-slot roadmap. Like-body available slots are maintained; this table does not assign routes or chargers.

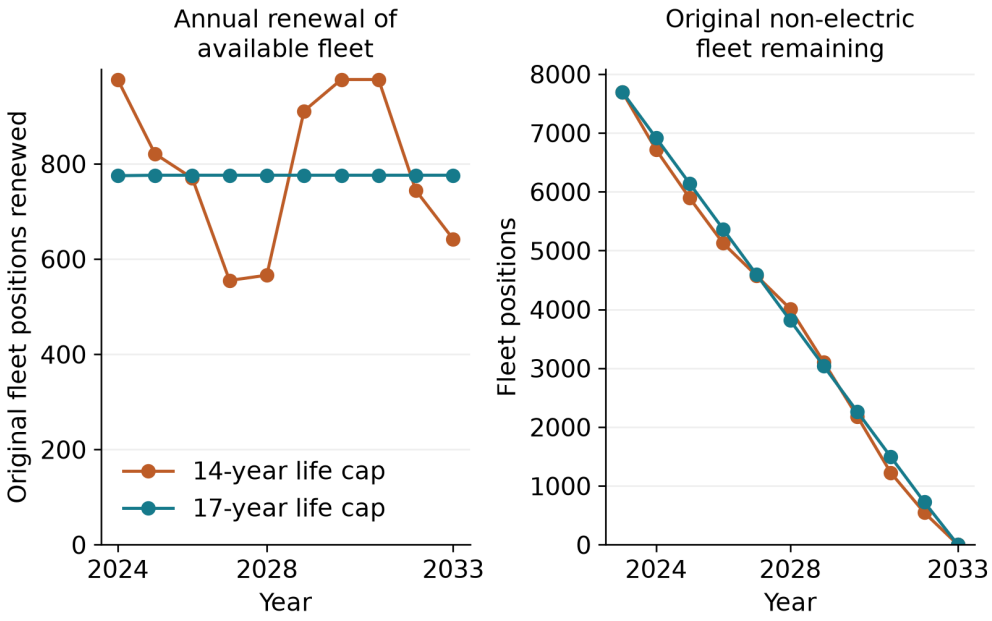


Figure 4: Executed London age-cohort roadmaps under fixed availability. The displayed numbers require compatible electric capacity, all-electric accessories, adequate chargers and trip checks before they become actual bus-purchase quantities.

7 Sensitivity, limitations and decision boundary

Reliable range is the dominant operational variable in the executed screen. At 149 km for the 40-ft proxy and 150 km for articulated buses, the weekday timetable requires 2,444 sequential battery requests versus 1,502 participating blocks, a 62.7% increase. At 250/251 km it requires 1,901 (26.6%), and at 300 km it requires 1,741 (15.9%). Even the 350-km sensitivity still creates 1,623 requests because several long duties exceed that distance. A 745-km highway block is the longest observed duty and necessarily needs terminal charging, a vehicle exchange or block redesign. These are screening bounds, not physical fleet counts.

Funding does not alter resource cost. In the base case, 0/25/50% eligible grants change the agency present value from CAD 4.58 to 3.64 and 2.71 billion, and the score from -96.4% to -56.4% and -16.4%. The high infrastructure case remains -87.3% even at 50%. A plan can therefore be affordable to the agency while costing society substantially more than ordinary renewal. Local procurement and wages must be reported as a separate regional value-added and employment layer; gross construction spending is not double-counted as a benefit.

The environmental result is sensitive to the baseline fuel mix, but the direction is stable: 29.2% under a renewable diesel/RNG mix, 72.3% under renewable-gas-heavy CNG, 77.8% under the weighted mix and 82.4% under fossil diesel. The inventory excludes charging/depot construction and end-of-life credits. Its 0.302–1.58 kg CO_2e/km baseline range and 19 g/km electric operating rate are sourced, while the vehicle and battery factors are transferred from a Latin American example. Adding infrastructure and a battery replacement to a fully matched boundary would lower the score.

The remaining uncertainties are specific and material: a complete January–August 2023 timetable or as-operated records; block-to-vehicle and block-to-garage links; vehicle ages and payload; depot parking, charger ports, firm power and commissioning dates; terminal exchange times; trolley feeder capacity; and 2033 vehicle winter tests. Without them, no city-wide Pareto point can be certified. The current result is a fixed-service, named-boundary policy case with an executed feasibility screen, not a claim that every 2033 trip is schedulable.

The three numerical implementation gates are: every scheduled trip is retained; every candidate block satisfies class, capacity, transfer, winter SOC and charger/site checks; and every cost and emission term has a source, year, unit and uncertainty range. Code currently passes the first structurally and returns `UNVERIFIED` when the second or third lacks inputs.

References

[1] 2023 HiMCM Problem B, user-provided problem statement.

[2] TransLink, *GTFS static feed 23SEP_20231020*, 4 September–31 December 2023, preserved at public Git commit `eb584b1`; route and arrival data used by permission of TransLink, Online mirror.

[3] TransLink, *2023 Business Plan, Operating and Capital Budget*, pp. 16–17, Online source.

[4] BC Hydro, *Executed tariff pages, effective 1 April 2023*, RS1600/1640/1650 and RS1901, pp. 2-35–2-48 and 6-13, Online source.

[5] Statistics Canada, *Population and population growth rate of census metropolitan areas*, 2021 Census, released February 2022, Online source.

[6] TransLink, 2023 public notice, Online source.
[7] TransLink, renewable diesel and electric fleet notice, 14 December 2023, Online source.
[8] TransLink, *TransLink shifts buses from fossil fuels to 100 per cent renewable diesel*, 14 December 2023, Online source.
[9] TransLink, *Low Carbon Fleet Transition Plan*, 2020, Online source.
[10] TransLink, *Low Carbon Fleet Transition Plan Update*, December 2020, Online source.
[11] TransLink, Board meeting package, June 2023, fleet procurement table p. 11, Online source.
[12] TransLink, *Zero Emissions Bus Fleet Technology Update*, Mayors' Council public agenda, June 2023, PDF pp. 28–29, Online source.
[13] TransLink, *2025 Business Plan, Operating and Capital Budget Summary*, 2023 actual bus service p. 23 and capital-program details pp. 50–51, Online source.
[14] TransLink, *2024 Business Plan, Operating and Capital Budget Summary*, fleet replacement project table p. 51, Online source.
[15] TransLink, *2026 Business Plan, Operating and Capital Budget*, active capital-program table p. 51, Online source.
[16] TransLink, *Approved 2025 Investment Plan*, Table A9 p. 63, Online source.
[17] TransLink, *Zero Emissions Fleet Transition Plan* summary, Mayors' Council agenda, November 2024, Online source.
[18] A. B. Rebouças and A. Cieplinski, *Quantifying avoided greenhouse gas emissions by e-buses in Latin America: A simplified life-cycle assessment methodology*, ICCT Working Paper, 2024, Online source.
[19] TransLink, 2023 TSPR annual route CSV, Online source.
[20] TransLink, *Transit Service Guidelines*, June 2018, pp. 21, 49, Online source.
[21] TransLink, *TransLink launches double-decker bus pilot project*, November 2017, Online source.
[22] TransLink, *Planned special events*, capacity-access reference, retrieved October 2026, Online source.
[23] Nova Bus, *LFSe+*, product specifications, Online source.
[24] New Flyer, *Xcelsior CHARGE NG*, product specifications, Online source.
[25] TransLink, *2023 Statutory Annual Report*, Online source.
[26] TransLink, 2023 TSPR route/day/season/time-range CSV, Online source.
[27] TransLink, 2023 TSPR direction peak-load CSV, Online source.
[28] TransLink, *Accountability Report 2023*, Online source.
[29] TransLink, *CMBC active and in-storage fleet*, snapshot effective 18 November 2025, pp. 2–5, Online source.
[30] M. Rogge et al., *Applied Energy* 211 (2018), 282–295, doi:10.1016/j.apenergy.2017.11.051.
[31] S. Pelletier et al., *Transportation Research C* 109 (2019), 174–193, doi:10.1016/j.trc.2019.10.012.
[32] K. Gkiotsalitis et al., *European Journal of Operational Research* 306 (2023), 189–206, Online source.
[33] U.S. Department of Transportation, *What Is a Benefit-Cost Analysis?*, Online source.
[34] Government of British Columbia, *Electricity emission factors*, Online source.
[35] Housing, Infrastructure and Communities Canada, *Zero Emission Transit Fund: GHG+ Guidance Module*, Annex D, Online source.

[36] Federal Transit Administration, *2023 Annual Agency Profile: Chicago Transit Authority*, NTD ID 50066, pp. 1–2, Online source.

[37] U.S. Department of Transportation, *NTD Vehicles: Age Distribution*, 2023 CTA records, NTD ID 50066, retrieved October 2026, Online source.

[38] U.S. Department of Transportation, *NTD Fuel and Energy*, 2023 CTA directly operated bus records, retrieved October 2026, Online source.

[39] CTA, *CTA to Nearly Double Electric Bus Fleet*, June 2023, Online source.

[40] TfL, *Bus Fleet Audit, 31 March 2023*, Online source.

[41] OpenAI, *Codex* (GPT-6), and *deepseek-flash*, research, calculation and drafting assistance, October 2026. See the appended AI Use Report and `research/ai_use_report.md`.

Letter to a Metro Vancouver decision-maker

To: TransLink Board and Mayors' Council
Subject: Conditions for a service-preserving all-electric fixed-route bus fleet by 2033

Dear decision-makers,

We treat 2033 as an accelerated target against TransLink's published 2040 goal. The recovered fall-2023 GTFS schedules 54,497 fixed-route bus trips across 25 service patterns; the representative weekday has 1,752 source-declared duty blocks and 1,087 simultaneous trips. We would retain every departure, route direction and capacity proxy in that timetable. Existing trolleybuses remain part of the electric baseline.

Under a 300-km overnight-charge sensitivity, the weekday timetable creates 1,741 sequential battery-block requests for 1,502 participating blocks, 15.9% more duty requests. The 57 double-deck blocks need a separate in-route charging solution. These are screening positions, not purchased bus counts: garage links, terminal exchange times, payload and site power are not public.

For the named ten-year policy case, gross present value is CAD 4.58 billion against CAD 2.33 billion for steady-state renewal. The economic score is −96.4%. A 25% grant changes the agency payment to CAD 3.64 billion and score to −56.4%; a 50% grant gives CAD 2.71 billion and −16.4%. The gross resource cost remains CAD 4.58 billion. A broad high infrastructure sensitivity reaches CAD 8.65 billion.

The production, operating and maintenance boundary yields a 29.2–82.4% emissions reduction under the named fuel scenarios, not the 98.8% operating-only figure. It excludes charging-depot construction and end-of-life credits. Converted service removes local tailpipe NO_x and PM at the vehicle, while battery and grid effects remain separate.

Start depot design, utility interconnection and permits in 2024; the published delivery range is six to eight years. Procure against commissioned sites in cohorts near 161 net new battery positions per year, test 40- and 60-foot buses under fully electric winter conditions, and hold double-deck and shuttle conversion behind in-route charging and verified payload. If a block fails time, SOC, charger or site capacity, publish that exact gap rather than deleting service.

Sincerely, Sincerely,
Fleet Transition Study Team

AI Use Report

Tools and versions. OpenAI Codex (GPT-6) and deepseek-flash were used in later sessions for research planning, source discovery, code implementation, data audits, mathematical review, and English drafting. No original 2023 HiMCM solution paper was requested or used.[41]

Queries and work products. The prompts requested: (i) an evidence-locked plan for environmental, financial and three-city fleet-transition models; (ii) independent literature and primary-source discovery, explicitly excluding the 2023 HiMCM solution; (iii) implementation and testing of trip/block, reserve, charger and tariff models; (iv) recovery and audit of public 2023 TransLink GTFS; (v) a high-standard LaTeX manuscript and reproducible repository; and (vi) completion of missing inputs without invented provenance. The corresponding outputs are retained in `src/`, `data/processed/`, `results/`, this manuscript, and the GitHub history. `research/ai_use_report.md` records the query-to-artifact map.

Verification. Source URLs, dates, pages, units and hashes are retained in the parameter ledger and provenance files. GTFS files match immutable Git blobs. The model suite includes explicit tests for schedule time, 2033 electrification, energy reserve, charger concurrency, tariff bounds, cost transfer and cohort feasibility. Computed values in this paper are traceable to named scripts. The human team must still verify every cited fact and decide what to submit.